

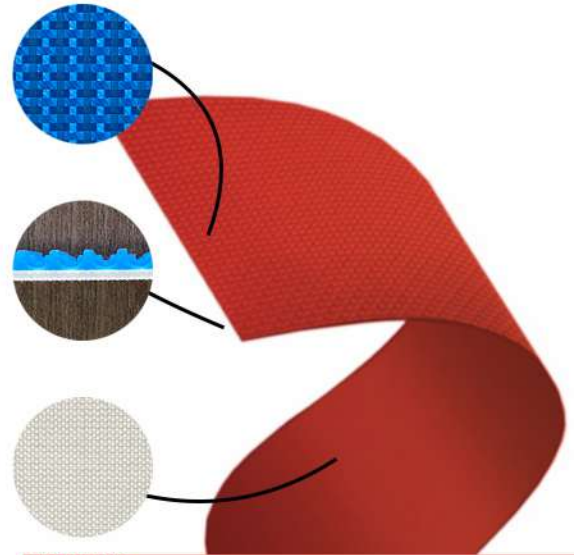
COMPOSITION
TOP

Conveying surface	Material	PVC
	thickness	3.3 MM
	Surface pattern	NIDO DE ABEJA
	Colour	BLUE
	Hadness	60 Shore A

Textile carcass	Material	POLYESTER (PET)
	Piles no.	2
	Weft type	RIGID

BOTTOM

Driving surface	Material	FABRIC
	Thickness	--
	Surface pattern	FABRIC
	Colour	WHITE


TECHNICAL SPECIFICATIONS

Total thickness	5.3 MM
Weight	4.7 KG/M ²
Elongation at 1%	10 N/mm
Breacking load	140 N/mm
Temperature resistance	min. -10 °C / max. +80 °C

Using of the belt with limit values may reduce its service life.

Minimum radius / diameter	Knife edge minimum radius	--
	Bending roller min. diameter	50 MM
	Counter-bending roller min. Diameter	60 MM

Coefficient of friction on driving surface	Steel sheet	0,18
	Laminated plastic/wood	0,20
	Steel roller	0,18
	Rubberized roller	0,25

Max. Production width 3000 MM

SUITABLE FOR

GENERAL PURPOSE OF LIGHT DUTY CONVEYING SYSTEM
 CARTON INDUSTRY , PAPER INDUSTRY , WOOD INDUSTRY , LOGISTICS ...
 FOOD INDUSTRY WITHOUT A DIRECT CONTACT , PACKING INDUSTRY
 SORTING AND RECYCLING INDUSTRY

FEATURES

Humidity influence	NO
Suitable to metal detector	NO
Conveying on skid bed	YES
Conveying on rollers	YES
Inclined conveying	NO
Curved conveyor	NO
Chemical resistances	NO
Oil and fat resistance	YES
Food grade	YES
Antistatic AS	YES

JOINT METHOD

SINGLE FINGER 80*20 or 80*15
 DOUBLE FINGER 50*20
 OVERLAP JOINT
 DIAGONAL FINGER
 MECHANICAL FASTENER

JOINTING PRESS SETTINGS

UPPER PLATEN TEMP. 175 °C
 BOTTOM PLATEN TEMP. 175 °C
 CURING TIME 3 MIN
 PRESSURE 1.5 BAR

DISCLAIMER

The specifications and values mentioned in the technical data sheet are drawn from the laboratory department of the company's factory, and Righa for Trading and Manufacturing SL (RIGALLI) is not responsible for any change or modification of these values or specifications.

Righa for trading and manufacturing SL

Travessera del Bovalar nº23 46970 Alaquàs, València SPAIN

ventas@riga-int.com

961 062 763