


COMPOSITION		
TOP		
Conveying surface	Material	PVC
	thickness	0.5 MM
	Surface pattern	SMOOTH
	Colour	BLUE
	Hardness	80 Shore A
Textile carcass	Material	POLYESTER (PET)
	Piles no.	2
	Weft type	RIGID
BOTTOM		
Driving surface	Material	FABRIC
	Thickness	--
	Surface pattern	FABRIC
	Colour	WHITE

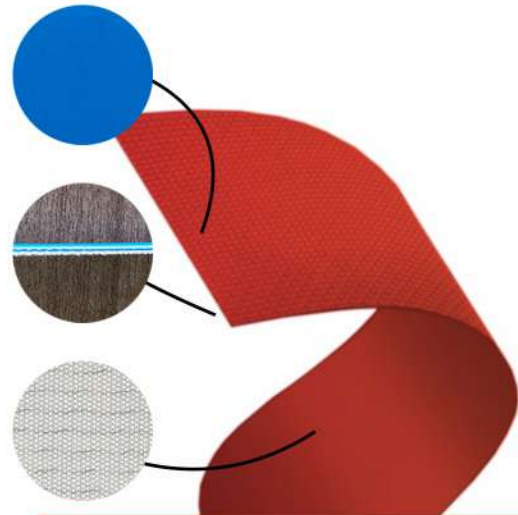

TECHNICAL SPECIFICATIONS		
Total thickness	2.0 MM	
Weight	2.4 KG/M ²	
Elongation at 1%	10 N/mm	
Breacking load	140 N/mm	
Temperature resistance	min. -10 °C / max. +80 °C Using of the belt with limit values may reduce its service life.	
Minimum radius / diameter	Knife edge minimum radius	--
	Bending roller min. diameter	40 MM
	Counter-bending roller min. Diameter	50 MM
Coefficient of friction on driving surface	Steel sheet	0,18
	Laminated plastic/wood	0,20
	Steel roller	0,18
	Rubberized roller	0,25
Max. Production width	3000 MM	

FEATURES	
Humidity influence	NO
Suitable to metal detector	NO
Conveying on skid bed	YES
Conveying on rollers	YES
Inclined conveying	NO
Curved conveyor	NO
Chemical resistances	NO
Oil and fat resistance	YES
Food grade	YES
Antistatic AS	YES

JOINT METHOD
SINGLE FINGER 80*10 or 80*15
DOUBLE FINGER 50*20
OVERLAP JOINT
DIAGONAL FINGER
MECHANICAL FASTENER

SUITABLE FOR
GENERAL PURPOSE OF LIGHT DUTY CONVEYING SYSTEM
FOOD GRADE

JOINTING PRESS SETTINGS
UPPER PLATEN TEMP. 175 °C
BOTTOM PLATEN TEMP. 175 °C
CURING TIME 3 MIN
PRESSURE 1.5 BAR

DISCLAIMER

The specifications and values mentioned in the technical data sheet are drawn from the laboratory department of the company's factory, and Righa for Trading and Manufacturing SL (RIGALLI) is not responsible for any change or modification of these values or specifications.