


COMPOSITION		
TOP		
Conveying surface	Material	PU
	thickness	0.55 MM
	Surface pattern	DIAMOND
	Colour	BLUE
	Hardness	92 Shore A
Textile carcass	Material	POLYESTER (PET)
	Piles no.	1
	Weft type	RIGID
BOTTOM		
Driving surface	Material	IMPREGNATION FABRIC
	Thickness	--
	Surface pattern	FABRIC
	Colour	LIGHT BLUE

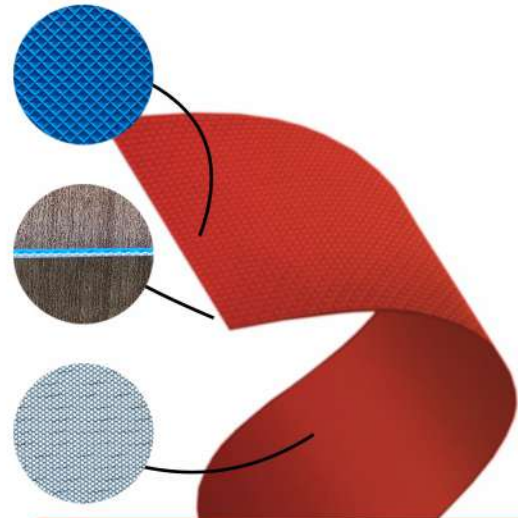

TECHNICAL SPECIFICATIONS		
Total thickness	0.9 MM	
Weight	1.1 KG/M ²	
Elongation at 1%	5 N/mm	
Breacking load	70 N/mm	
Temperature resistance	min. -10 °C / max. +80 °C Using of the belt with limit values may reduce its service life.	
Minimum radius / diameter	Knife edge minimum radius	YES
	Bending roller min. diameter	--
	Counter-bending roller min. Diameter	10 MM
Coefficient of friction on driving surface	Steel sheet	0,18
	Laminated plastic/wood	0,20
	Steel roller	0,18
	Rubberized roller	0,25
Max. Production width	3000 MM	

FEATURES	
Humidity influence	NO
Suitable to metal detector	NO
Conveying on skid bed	YES
Conveying on rollers	YES
Inclined conveying	NO
Curved conveyor	YES
Chemical resistances	NO
Oil and fat resistance	YES
Food grade	YES
Antistatic AS	YES

JOINT METHOD	
SINGLE FINGER 80*10 or 80*15	
DIAGONAL FINGER	
MECHANICAL FASTENER	

SUITABLE FOR	
GENERAL PURPOSE OF LIGHT DUTY CONVEYING SYSTEM FOOD GRADE , BISCUIT INDUSTRY , BACKERY INDUSTRY CHOCOLATE INDUSTRY , MEAT AND FISH INDUSTRY ..	

JOINTING PRESS SETTINGS	
UPPER PLATEN TEMP. 162 °C	
BOTTOM PLATEN TEMP. 162 °C	
CURING TIME 3 MIN	
PRESSURE 1.5 BAR	

DISCLAIMER

The specifications and values mentioned in the technical data sheet are drawn from the laboratory department of the company's factory, and Righa for Trading and Manufacturing SL (RIGALLI) is not responsible for any change or modification of these values or specifications.