


COMPOSITION		
<b>TOP</b>		
<b>Conveying surface</b>	Material	PU
	thickness	0.3 MM
	Surface pattern	SMOOTH
	Colour	BLUE
	Hardness	92 Shore A
<b>Textile carcass</b>	Material	POLYESTER (PET)
	Piles no.	1
	Weft type	RIGID
<b>BOTTOM</b>		
<b>Driving surface</b>	Material	IMPREGNATION FABRIC
	Thickness	--
	Surface pattern	FABRIC
	Colour	LIGHT BLUE

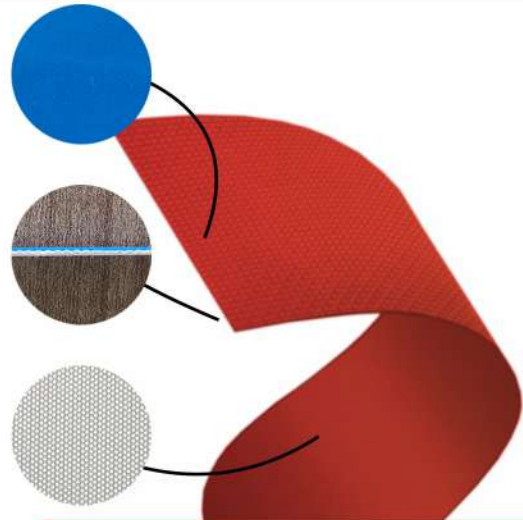

TECHNICAL SPECIFICATIONS		
<b>Total thickness</b>	0.8 MM	
<b>Weight</b>	0.9 KG/M <sup>2</sup>	
<b>Elongation at 1%</b>	5 N/mm	
<b>Breacking load</b>	70 N/mm	
<b>Temperature resistance</b>	min. -10 °C / max. +90 °C Using of the belt with limit values may reduce its service life.	
<b>Minimum radius / diameter</b>	Knife edge minimum radius	YES
	Bending roller min. diameter	--
	Counter-bending roller min. Diameter	10 MM
<b>Coefficient of friction on driving surface</b>	Steel sheet	0,18
	Laminated plastic/wood	0,20
	Steel roller	0,18
	Rubberized roller	0,25
<b>Max. Production width</b>	3000 MM	

FEATURES	
<b>Humidity influence</b>	NO
<b>Suitable to metal detector</b>	NO
<b>Conveying on skid bed</b>	YES
<b>Conveying on rollers</b>	YES
<b>Inclined conveying</b>	NO
<b>Curved conveyor</b>	YES
<b>Chemical resistances</b>	NO
<b>Oil and fat resistance</b>	YES
<b>Food grade</b>	YES
<b>Antistatic AS</b>	YES

JOINT METHOD	
SINGLE FINGER 80*10 or 80*15	
DIAGONAL FINGER	
MECHANICAL FASTENER	

SUITABLE FOR	
GENERAL PURPOSE OF LIGHT DUTY CONVEYING SYSTEM FOOD GRADE , BISCUIT INDUSTRY , BAKERY INDUSTRY CHOCOLATE INDUSTRY..	

JOINTING PRESS SETTINGS	
UPPER PLATEN TEMP. 162 °C	
BOTTOM PLATEN TEMP. 162 °C	
CURING TIME 3 MIN	
PRESSURE 1.5 BAR	

**DISCLAIMER**

The specifications and values mentioned in the technical data sheet are drawn from the laboratory department of the company's factory, and Righa for Trading and Manufacturing SL (RIGALLI) is not responsible for any change or modification of these values or specifications.