

Model No. PVC/VPB/DI/1.5-1

COMPOSITION

Top Conveying surface	Material	PVC
	Thickness	0.4 mm
	Surface pattern	Smooth
	Colour	Petrol Green
	Hardness	80 Shore A
Textile carcass	Material	Polyester (PET)
	Piles no.	1
	Weft type	Light Rigid
Bottom Driving surface	Material	PVC
	Thickness	0.7 mm
	Surface pattern	Diamond
	Colour	Petrol Green

TECHNICAL SPECIFICATIONS





Total thickness	1.5	mm
Weight	1.6	kg/m ²
Elongation at 1%	5	N/mm
Breaking load	70	N/mm
Temperature resistance	min.	-10 °C
	max.	+80 °C
*Use of the belt with limit values may reduce its life.		
● Minimum radius / diameter Pol Vester (Pet)		
Knife edge minimum radius	Yes	
Bending roller min. diameter	-	mm
Counter-bending roller min. Diameter	10	mm
● Coefficient of friction on driving surface		
Steel sheet	0.25	
Laminated plastic/wood	0.29	
Steel roller	0.25	
Rubberized roller	0.38	
● Max. Production width		
	3000	mm

SUITABLE FOR

General purpose of light duty conveying system.
Material could be used for the pillow belts.

> Technical data sheet

• Industrial application

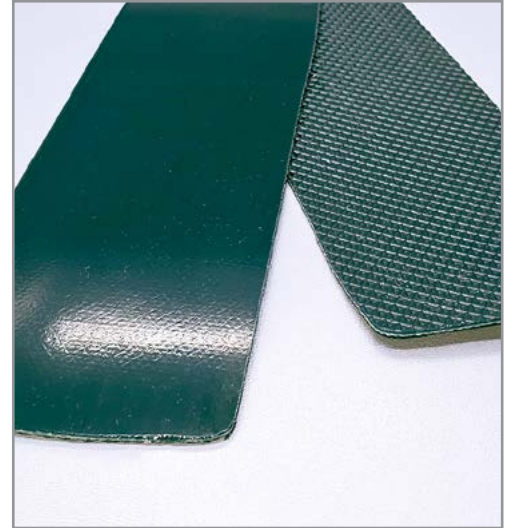

TECHNICAL SPECIFICATIONS

Humidity influence	Yes
Suitable to metal detector	No
Conveying on skid bed	Yes
Conveying on rollers	Yes
Inclined conveying	No
Troughed application	Yes
Flame retardant	No
Curved conveyor	No
Chemical resistances	Limited
Oil and fat resistance	Yes
Food grade	No
Antistatic AS	No

JOINT METHOD

Single finger
Diagonal finger
Mechanical fastener

TECHNICAL SPECIFICATIONS

Upper platen temp	172 °C
Bottom platen temp	172 °C
Curing time	3 Min
Pressure	1.5 Bar

DISCLAIMER

The specifications and values mentioned in the technical data sheet are drawn from the laboratory department of the company's factory, and Righa for Trading and Manufacturing SLU (RIGALLI) is not responsible for any change or modification of these values or specifications.