

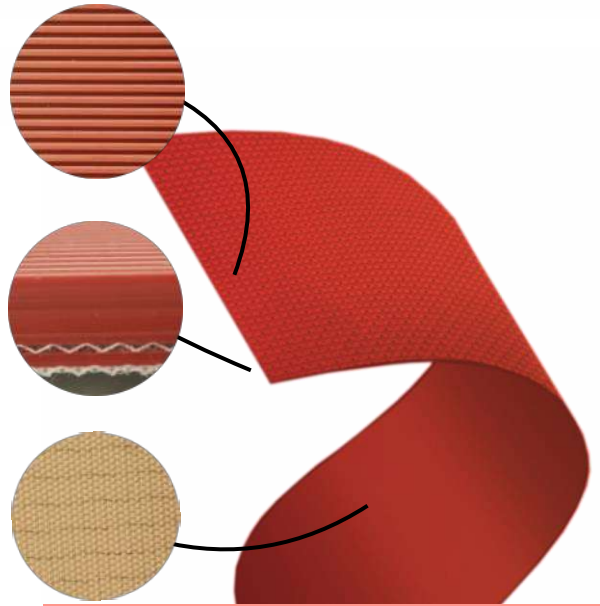
COMPOSITION
TOP

Conveying surface	Material	PVC RUBBER MIXTURE
	thickness	4.8 MM
	Surface pattern	LONGITUDE LINES
	Colour	RED
	Hadness	50 Shore A

Textile carcass	Material	POLYESTER (PET)
	Piles no.	2
	Weft type	RIGID

BOTTOM

Driving surface	Material	FABRIC
	Thickness	--
	Surface pattern	ANTISTATIC
	Colour	GREY


TECHNICAL SPECIFICATIONS

Total thickness	6.4 MM	
Weight	6.5 KG/M ²	
Elongation at 1%	12 N/mm	
Temperature resistance	min. -10 °C / max. +80 °C Using of the belt with limit values may reduce its service life.	
Minimum radius / diameter	Knife edge minimum radius	--
	Bending roller min. diameter	80 MM
	Counter-bending roller min. Diameter	150 MM
Coefficient of friction on driving surface	Steel sheet	0.25
	Laminated plastic/wood	0.22
	Steel roller	0.25
	Rubberized roller	0.30
Max. Production width	3000 MM	

FEATURES

Humidity influence	LIMITED
Suitable to metal detector	NO
Conveying on skid bed	YES
Conveying on rollers	YES
Inclined conveying	YES
Troughed application	NO
Curved conveyor	NO
Chemical resistances	LIMITED
Oil and fat resistance	LIMITED
Food grade	NO
Antistatic AS	YES

JOINT METHOD

SINGLE FINGER 80*20
DOUBLE FINGER 50*20
OVERLAP JOINT
MECHANICAL FASTENER

SUITABLE FOR

GENERAL PURPOSE OF LIGHT AND HEAVY DUTY CONVEYING SYSTEM
CARTON AND PAPER , WOOD INDUSTRY ...
LABELING MACHINES , PACKING INDUSTRY
HIGH GRIP SURFACE

JOINTING PRESS SETTINGS

UPPER PLATEN TEMP. 180 °C
BOTTOM PLATEN TEMP. 180 °C
CURING TIME 3 MIN
PRESSURE 1.5 BAR

DISCLAIMER

The specifications and values mentioned in the technical data sheet are drawn from the laboratory department of the company's factory, and Righa for Trading and Manufacturing SL (RIGALLI) is not responsible for any change or modification of these values or specifications.

Righa for trading and manufacturing SL

Travessera del Bovalar nº23 46970 Alaquàs, València SPAIN

ventas@riga-int.com

961 062 763