



**COMPOSITION**

<b>TOP</b>		
<b>Conveying surface</b>	Material	TPU POLYESTER
	thickness	2.8MM
	Surface pattern	GOLF
	Colour	LIGHT BLUE
	Hardness	90 Shore A
<b>Textile carcass</b>	Material	
	Piles no.	
<b>BOTTOM</b>		
<b>Driving surface</b>	Material	TPU POLYESTER
	Pitch	25.4 MM
	Surface pattern	SYNCHRONOUSE TOOTH
	Colour	LIGHT BLUE

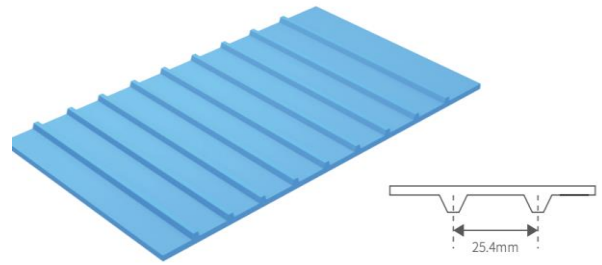

**TECHNICAL SPECIFICATIONS**

<b>Total thickness</b>	5.9MM	
<b>Weight</b>	4.6 KG/M <sup>2</sup>	
<b>Elongation at 1%</b>	2.9 N/mm	
<b>Max. Load</b>	210 Kg/M <sup>2</sup>	
<b>Temperature resistance</b>	min. -5 °C / max. +80 °C Using of the belt with limit values may reduce its service life.	
<b>Pulley and Wheels Type</b>	Number of teeth	Diameter
	8 teeth	64.2 MM
	10 teeth	80.25 MM
	12 teeth	96.3MM



**FEATURES**

<b>Humidity influence</b>	YES
<b>Suitable to metal detector</b>	NO
<b>Conveying on skid bed</b>	YES
<b>Microbial Resistance</b>	YES
<b>Hydrolytic Stability</b>	LIMITED
<b>Chemical resistances</b>	YES
<b>Oil and fat resistance</b>	YES
<b>Food grade</b>	YES

**JOINT METHOD**

FINGER JOINT  
FACE TO FACE JOINT  
OVERLAP JOINT

**JOINTING PRESS SETTINGS**

UPPER PLATEN TEMP. 165 °C  
BOTTOM PLATEN TEMP. 165°C  
CURING TIME 3 MIN  
PRESSURE 1.5 BAR

**SUITABLE FOR**

GENERAL PURPOSE OF LIGHT DUTY CONVEYING SYSTEM  
FOOD APPLICATION , MEAT FISH AND CHEESE INDUSTRY...

**DISCLAIMER**

The specifications and values mentioned in the technical data sheet are drawn from the laboratory department of the company's factory, and Righa for Trading and Manufacturing SL (RIGALLI) is not responsible for any change or modification of these values or specifications.

