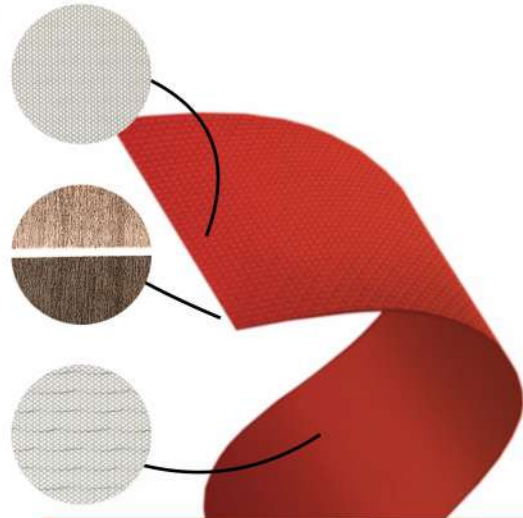


COMPOSITION

TOP		
Conveying surface	Material	IMPREGNATION FABRIC
	thickness	--
	Surface pattern	FABRIC
	Colour	WHITE
	Hadness	--
MIDDLE MATERIAL AND COLOUR : PU (poliuretano) - TRANSPARENT		
Textile carcass	Material	POLYESTER (PET)
	Piles no.	2
	Weft type	RIGID
BOTTOM		
Driving surface	Material	IMPREGNATION FABRIC
	Thickness	--
	Surface pattern	FABRIC
	Colour	WHITE


TECHNICAL SPECIFICATIONS

Total thickness	1.1 MM	
Weight	1.1 KG/M ²	
Elongation at 1%	8 N/mm	
Breacking load	120 N/mm	
Temperature resistance	min. -10 °C / max. +90 °C Using of the belt with limit values may reduce its service life.	
Minimum radius / diameter	Knife edge minimum radius	--
	Bending roller min. diameter	8 MM
	Counter-bending roller min. Diameter	15 MM
Coefficient of friction on driving surface	Steel sheet	0,18
	Laminated plastic/wood	0,20
	Steel roller	0,18
	Rubberized roller	0,25
Max. Production width	3000 MM	

FEATURES

Humidity influence	NO
Suitable to metal detector	NO
Conveying on skid bed	YES
Conveying on rollers	YES
Inclined conveying	NO
Curved conveyor	NO
Chemical resistances	NO
Oil and fat resistance	NO
Food grade	YES
Antistatic AS	YES

JOINT METHOD

SINGLE FINGER 80*10 or 80*15
DIAGONAL FINGER
MECHANICAL FASTENER

SUITABLE FOR

GENERAL PURPOSE OF LIGHT DUTY CONVEYING SYSTEM
FOOD GRADE , BISCUIT INDUSTRY , BAKERY INDUSTRY

JOINTING PRESS SETTINGS

UPPER PLATEN TEMP. 162 °C
BOTTOM PLATEN TEMP. 162 °C
CURING TIME 3 MIN
PRESSURE 1.5 BAR

DISCLAIMER

The specifications and values mentioned in the technical data sheet are drawn from the laboratory department of the company's factory, and Righa for Trading and Manufacturing SL (RIGALLI) is not responsible for any change or modification of these values or specifications.