

Model No. PVC/PO/AC/2.0-2

COMPOSITION

Top Conveying surface	Material	IMPREGNATION FABRIC
	Thickness	- mm
	Surface pattern	Fabric
	Colour	Blue
	Hadness	-
Middle	Material	Blue PVC
	Piles no.	2
	Weft type	Rigid
Bottom Driving surface	Material	Impregnation Fabric
	Thickness	- mm
	Surface pattern	Fabric
	Colour	Blue

TECHNICAL SPECIFICATIONS

Total thickness	2.0	mm
Weight	2.0	kg/m ²
Elongation at 1%	10	N/mm
Breacking load	140	N/mm
Temperature resistance	min.	-10 °C
	max.	+90 °C

*Use of the belt with limit values may reduce its life.

● Minimum radius / diameter Pol Vester (Pet)

Knife edge minimum radius	-
Bending roller min. diameter	40 mm
Counter-bending roller min. Diameter	40 mm

● Coefficient of friction on driving surface

Steel sheet	0.18
Laminated plastic/wood	0.20
Steel roller	0.18
Rubberized roller	0.25

● Max. Production width





3000 mm

SUITABLE FOR

General purpose of light duty conveying system.
Food grade, Biscuit industry, Bakery industry.

> Technical data sheet

- Industrial application
- Food application

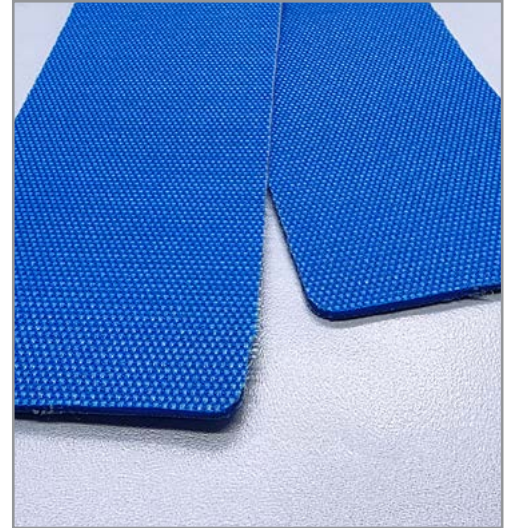

TECHNICAL SPECIFICATIONS

Humidity influence	No
Suitable to metal detector	No
Conveying on skid bed	Yes
Conveying on rollers	Yes
Inclined conveying	No
Troughed application	No
Flame retardant	No
Curved conveyor	No
Chemical resistances	No
Oil and fat resistance	No
Food grade	Yes
Antistatic AS	Yes

JOINT METHOD

Single finger	Diagonal finger Mechanical fastener
Double Finger	
Overlap Joint	

TECHNICAL SPECIFICATIONS

Upper platen temp	175 °C
Bottom platen temp	175 °C
Curing time	3 Min
Pressure	1.5 Bar

DISCLAIMER

The specifications and values mentioned in the technical data sheet are drawn from the laboratory department of the company's factory, and Righa for Trading and Manufacturing SLU (RIGALLI) is not responsible for any change or modification of these values or specifications.