

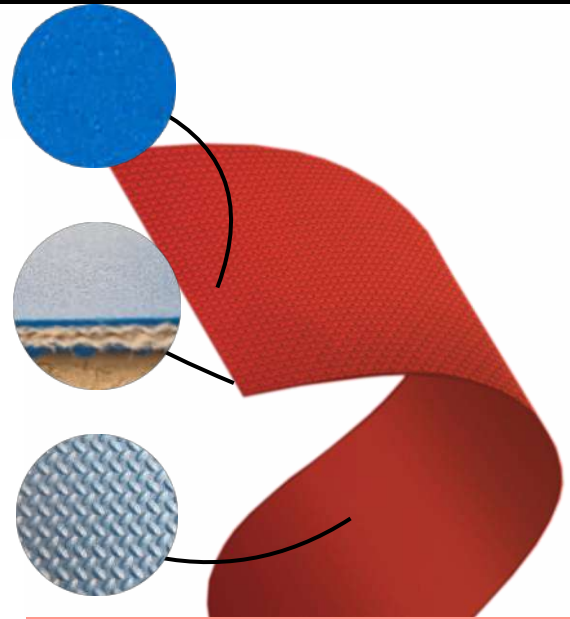
**COMPOSITION**
**TOP**

<b>Conveying surface</b>	Material	PU
	thickness	0.7 MM
	Surface pattern	SMOOTH MATT
	Colour	BLUE
	Hadness	92 Shore A

<b>Textile carcass</b>	Material	POLYESTER (PET)
	Piles no.	2
	Weft type	RIGID

**BOTTOM**

<b>Driving surface</b>	Material	PU
	Thickness	0.7 MM
	Surface pattern	RICE
	Colour	BLUE


**TECHNICAL SPECIFICATIONS**

<b>Total thickness</b>	2.3 MM	
<b>Weight</b>	2.5 KG	
<b>Elongation at 1%</b>	12 N/mm	
<b>Breacking load</b>	140 N/mm	
<b>Temperature resistance</b>	min. -10 °C / max. +80 °C Using of the belt with limit values may reduce its service life.	

<b>Minimum radius / diameter</b>	Knife edge minimum radius	--
	Bending roller min. diameter	40 MM
	Counter-bending roller min. Diameter	60 MM

<b>Coefficient of friction on driving surface</b>	Steel sheet	0.18
	Laminated plastic/wood	0.20
	Steel roller	0.18
	Rubberized roller	0.25

<b>Max. Production width</b>	3000 MM
------------------------------	---------

**SUITABLE FOR**

GENERAL PURPOSE OF LIGHT DUTY CONVEYING SYSTEM  
FOOD GRADE , BISCUIT INDUSTRY , BAKERY INDUSTRY  
MEAT AND FISH INDUSTRY ..  
FRIES CHIPS EXT...

**FEATURES**

<b>Humidity influence</b>	YES
<b>Suitable to metal detector</b>	NO
<b>Conveying on skid bed</b>	YES
<b>Conveying on rollers</b>	YES
<b>Inclined conveying</b>	LIMITED
<b>Troughed Application</b>	NO
<b>Curved conveyor</b>	NO
<b>Chemical resistances</b>	LIMITED
<b>Oil and fat resistance</b>	YES
<b>Food grade</b>	YES
<b>Antistatic AS</b>	YES

**JOINT METHOD**

SINGLE FINGER 80\*10 or 80\*15  
DIAGONAL FINGER  
MECHANICAL FASTENER

**JOINTING PRESS SETTINGS**

UPPER PLATEN TEMP. 162 °C  
BOTTOM PLATEN TEMP. 162 °C  
CURING TIME 3 MIN  
PRESSURE 1.5 BAR

**DISCLAIMER**

The specifications and values mentioned in the technical data sheet are drawn from the laboratory department of the company's factory, and Righa for Trading and Manufacturing SL (RIGALLI) is not responsible for any change or modification of these values or specifications.

**Righa for trading and manufacturing SL**

Travessera del Bovalar nº23 46970 Alaquàs, València SPAIN

[ventas@riga-int.com](mailto:ventas@riga-int.com)

961 062 763